




www.zaxisconnector.com

## Z-AXIS Connector Company

1330 Eddowes Road, Unit 6, Warminster, PA 18974  
(215) 918-0955 FAX (215) 918-0950

# Z-Fill Z-Alloy Elastomeric Connectors

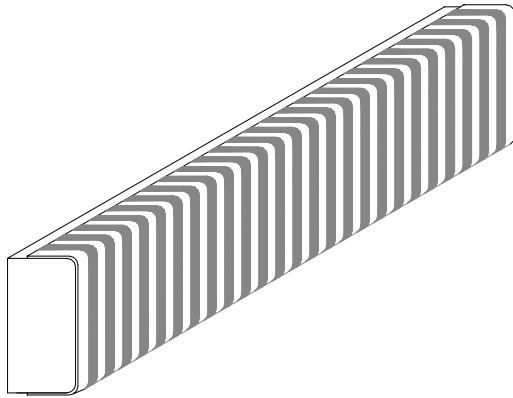

### DIMENSIONS

<b>Height</b>	0.020" ( 0.50 mm) to 0.750" ( 19 mm)
<b>Width</b>	0.020" ( 0.50 mm) to 0.750" ( 19 mm)
<b>Length</b>	0.020" ( 0.50 mm) to 8.00" ( 20 cm)

### CONDUCTOR RELATIONSHIPS

Diameter	Pitch
0.002" (0.05mm)	0.004" (0.1mm) Standard
Custom pitches and groupings available	

### CONDUCTOR METALLURGY

Proprietary copper-nickel alloy

### PROPERTIES

**Contact Resistance:** <0.5 Ohms per contact, typical  
**Core Material:** Silicone rubber  
**Core Durometer:** 50 Shore A, standard  
**Film:** 0.001" Polyimide, standard  
**Humidity Range:** 0-100% (non-condensing)  
**Temperature Range:** -45° to +125°C  
**Dielectric Withstanding Voltage:** 500V rms, minimum

Properties are based on 4 to 5 conductive paths between .020" gold plated pads on .040" centers with a 0.250" substrate separation.

### FEATURES

- Stable Resistance
- Corrosion Resistant
- Multiple Line Contacts
- Lower Compression Ratios
- Flexible Substrate
- High Strength Conductors

Z-AXIS' Fine-Pitch Z-Alloy Elastomeric Connectors provide stable resistance and durability for high-density packaging under a variety of demanding environmental conditions.

These connectors satisfy a wide range of applications including interconnects between pc boards, displays, flex cables and ceramic substrates. The contact area is well suited for contacting a variety of pad materials including deposited metallurgies on displays, glass, ceramics, etc.

The connectors consist of a flexible ultra-fine-pitch connector element surrounding an elastomeric core. The fine conductors consist of closely spaced parallel Z-Alloy wires to provide multiple line contacts on each circuit pad.

The standard element incorporates 0.002" (0.05mm) diameter wires, retained by a thin flexible polyimide film, at a 0.004" (0.10mm) center-to-center pitch. This fine pitch provides contact redundancy on board pads as small as 0.010" (0.25mm) with centers as close as 0.020" (0.5mm).

The combination of the highly flexible connector element and its soft, elastomeric core provide the shape and compliance to ensure reliable contacts which compensate for variations in surface flatness and pad irregularities. The core is designed to resist permanent set under long term compression.